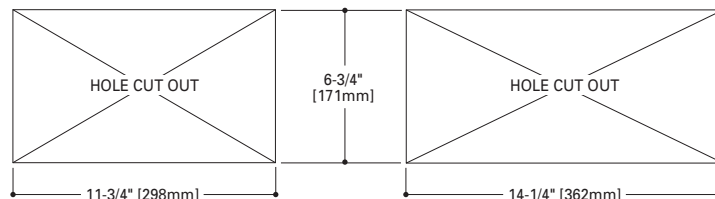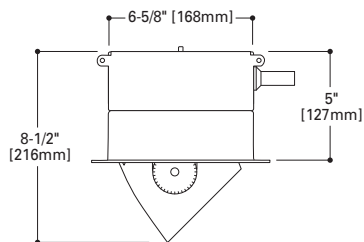# AMETRIX™

Vault

SMALL

- Extruded aluminum housing
- Die-cast aluminum end caps
- Integrated visor option - solid, perf or opal window
- Die-formed 94% reflective dual-finish anodized aluminum reflector
- Gasketed hinging doorframe - indoor toolless entry
- PointGrab™ adjustment
- Non-IC rated

Integral

6-5/8" [168mm]

5" [127mm]

8-1/2" [216mm]

HOLE CUT OUT   6-3/4" [171mm]   HOLE CUT OUT

11-3/4" [298mm]   14-1/4" [362mm]

LAMP CHART

SOURCE	WATTAGE	LENGTH
Tungsten	100	11-3/4"
	150	14-1/4"
	250	14-1/4"
Metal Halide	39	11-3/4"
	70	14-1/4"
	150	14-1/4"
Fluorescent	26	14-1/4"

ORDERING INFORMATION

SAMPLE NUMBER: VN-SI-P-1-T150-120-W-SRI

Product	Size - Indoor/Outdoor	Lens	No. of Lamps	Lamp/Ballast Type	Wattage
❏ **VN** Vault No Visor	❏ **SI** Small Indoor	❏ **C** Clear	❏ **1** 1 Lamp	❏ **F** Fluorescent (Electronic)	❏ **026** 26W (F)
❏ **VS** Vault Solid Visor		❏ **P** Micro-prismatic		❏ **T** Tungsten Halogen	❏ **039** 39W (E)
❏ **VO** Vault Opal Visor		❏ **N** None**		❏ **E** Metal Halide (Electronic)	❏ **070** 70W (E)
❏ **VP** Vault Square Perf Visor					❏ **100** 100W (T)
					❏ **150** 150W (E, T)
					❏ **250** 250W (T)

Voltage	Finish	Mounting	Modification	Accessories	
❏ **120** 120V (T)	❏ **W** White	❏ **SRI** Semi-Recessed Integral	❏ **MOD** Provide description of the modification. (Consult factory)	❏ **Hanger Bars** (Consult factory)	
❏ **277** 277V	❏ **S** Silver			❏ **Drywall** (Consult factory)	
❏ **347** 347V	❏ **B** Bronze				
	❏ **C** Custom (Consult factory)				

Specifications and dimensions subject to change without notice.

*   Not available with all sources or options. (Consult factory)

** Only available for fluorescent option.